
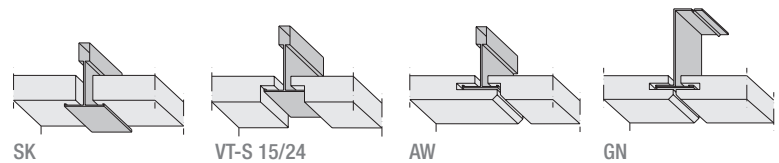


## THERMATEX Aquatec Medical


Thanks to its special composition, THERMATEX Aquatec Medical shows moisture resistance of up to 100% RH. This means that even with a high humidity and temperatures between 0 and 40°C the panel is inherently stable at all times. If necessary, THERMATEX Aquatec Medical can be cleaned using water\*. Additionally, thanks to good sound absorption, the ceiling panel shows excellent acoustic features, which makes it a perfect solution for areas with strict hygiene requirements.

|                    |  |
|--------------------|--|
| SYSTEM             | <b>C</b> Exposed Grid System, demountable ceiling<br><b>A</b> Concealed system, panels demountable |
| Dimensions         | <b>■</b> 600 x 600 mm  |
| Thickness / Weight | <b>■</b> 19 mm (c. 4.7 kg/m <sup>2</sup> )   |
| Colour             | <b>■</b> White similar to RAL 9010   |
| Edge details       | <b>■</b> SK, VT-S 15/24, AW/GN   |

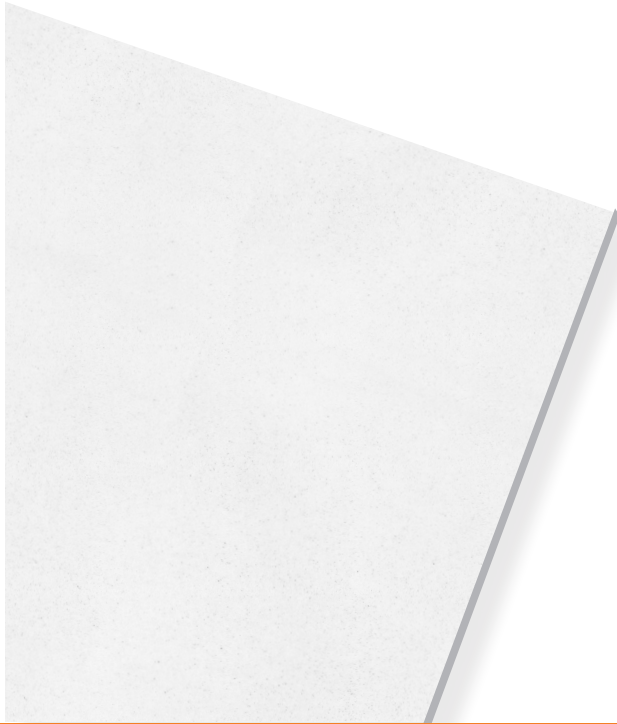

### TECHNICAL PERFORMANCE

|   |  |
|---|--|
| Building material class                     | <b>■</b> A2-s1, d0 as per EN 13501-1<br>Class A as per ASTM E1264 (tested according to ASTM E84)   |
| Classification of acoustic ceiling systems: |  |
| Sound absorption                            | <b>■</b> $\alpha_W = 0.90$ as per EN ISO 11654 and EN ISO 354<br>$NRC = 0.90$ as per ASTM C423 and ASTM E1264  |
| Sound attenuation                           | <b>■</b> $D_{n,t,w} = 28$ dB as per EN 717-1 and EN 10848<br>$CAC = 28$ dB as per ASTM E413-1 and ASTM E1264<br>(19 mm thickness, according to test certificate) |
| Light reflectance                           | <b>■</b> Up to 88%   |
| Thermal conductivity                        | <b>■</b> $\lambda = 0.040$ W/mK as per EN 12667  |
| Humidity                                    | <b>■</b> Up to 100% RH   |
| Permeability                                | <b>■</b> PM1 (30 m <sup>3</sup> /hm <sup>2</sup> ) as per DIN 18177  |
| Clean room classification                   | <b>■</b> ISO-class 3 as per ISO 14644-1  |
| Hygiene                                     | <b>■</b> anti-microbial treatment against bacteria and fungi   |
| Scrubability                                | <b>■</b> tested as per ASTM D2486 (modified)   |
| Washability                                 | <b>■</b> tested as per ASTM D4828 (modified)   |

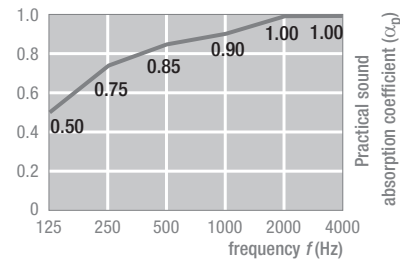

\*Pressure cleaning is only possible for ceilings installed on exposed grid (SK edge detail) and with a corrosion resistant grid system. The full cleaning guidelines need to be adhered to.

Due to reproduction processes colours shown in this catalogue may differ from the actual product colour. Product selection should always be made from AMF samples. All details and technical information stated in this brochure or other publicity material referring to AMF ceiling systems are based on test reports obtained under laboratory conditions. It is the responsibility of the customer to ensure that this data is suitable for the proposed application.

All information provided is based on current technical data. Further relevant test reports, assessments and installation guidelines are available. All system details conform with current standards and are based on the use of AMF products and system components. AMF accepts no liability or responsibility for use of third party components, or for any variations to conditions stipulated in test data. Mixing of production batches is not recommended.

All technical data is subject to change without prior notice and is governed by AMF Terms and Conditions of Sales. This catalogue supersedes all previous editions. Errors and omissions excepted. Printing errors excepted.



Knauf AMF GmbH & Co. KG  
Elsenthal 15  
D-94481 Grafenau  
Phone 08552 / 422-0 - Fax 08552 / 422-32  
info@knaufamf.de - www.amfceilings.com